

DS-PDC10AM-EG2-WB Wireless PIR AM Curtain Detector

- Slim design for window frame installation
- IP65 weather resistance for outdoor application
- Active IR anti-masking
- Directional detection support
- · Multiple enrollment methods and easy installation
- Frequency hopping against jamming for reliable transmission





Specification

Model		DS-PDC10AM-EG2-WB
Detection	Detection Method	Passive Infrared
	Detection Range	Wall Mount: 10m Ceiling Mount: 5m
	Detection Angle	5°
	Detection Zones	32
	Detectable Speed	0.3~2m/s
Performance	Sensitivity	Auto,Pet
	White Light Filter	6500lux
	Pet Immunity	Wall Mount: 12Kg Ceiling Mount: None
	Digital Temperature Compensation	Support
	Creep Zone Protection	Support
	Anti-masking	Support
	Digital Processing	Support
	Sealed Optics	Support
Feature	Tamper Protection	Front,Rear
	Environment Temperature Indicator	Support
	Signal Strength Indicator	Support
	Directional Detection	Support
Interface	Power Switch	Power Up Enrolling
	LED Indicator	Blue(Alarm), Green+Orange(Mask)
Transmission	Transmission Technology	Tri-X Wireless
	Transmission Method	Two-Way RF Wireless




	T	
	Transmission Frequency	433MHz
	Transmission Security	AES-128 Encryption
	Transmission Range(Free Space)	1Km
	Frequency Hopping	Support
	Enrolling Method	Power up,Remote ID,QR Code
Electrical Characteristics	Standard Battery Life	5 years in work status (being triggered 20 times per day)
	Power Supply	Battery Powered
	Battery Type	CR123A × 2
	Typical Voltage	3V
General	Operation Temperature	-25 °C to 60 °C (-13 °F to 140 °F)
	Storage Temperature	-25 °C to 60 °C (-13 °F to 140 °F)
	Operation Humidity	10% to 90%
	IP Rate	IP65
	Dimension(Wx HxD)	29.2mm × 134.4mm × 39.5mm
	Weight	118.5g
	Mounting Height	2 to 3.5m
	Mounting Method	Wall,Ceiling
	Application Scenario	Indoor,Outdoor
	Bracket	L-shaped adapter included

Available Model

DS-PDC10AM-EG2-WB



Installation

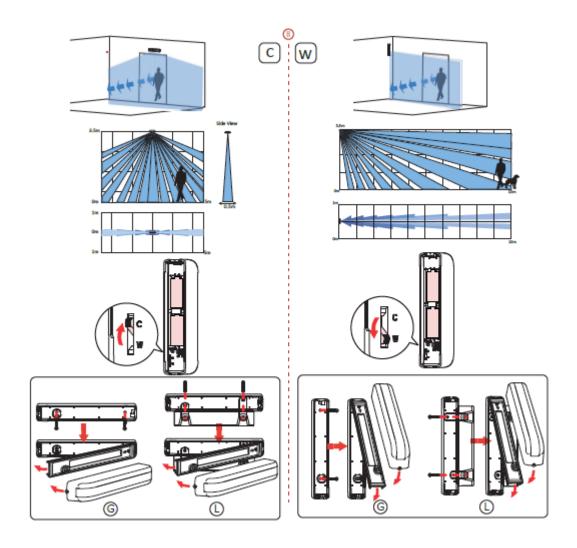



Distributed by

HIKVISION°

Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 overseasbusiness@hikvision.com

Hikvision USA T+1-909-895-0400

T+1-909-895-0400 sales.usa@hikvision.com

Hikvision Australia T+61-2-8599-4233 salesau@hikvision.com

Hikvision India T+91-22-28469900 sales@pramahikvision.com

Hikvision Canada T+1-866-200-6690 sales.canada@hikvision.com

Hikvision Thailand T +662-275-9949 sales.thailand@hikvision.com Hikvision Europe T +31-23-5542770 sales.eu@hikvision.com

Hikvision Italy T+39-0438-6902 info.it@hikvision.com

Hikvision Brazil T +55 11 3318-0050 Latam.support@hikvision.com

Hikvision Turkey T +90 (216)521 7070- 7074 sales.tr@hikvision.com

Hikvision Malaysia T+601-7652-2413 sales.my@hikvision.com Hikvision UK & Ireland T +01628-902140 sales.uk@hikvision.com

Hikvision South Africa Tel: +27 (10) 0351172 sale.africa@hikvision.com

Hikvision France T +33(0)1-85-330-450 info.fr@hikvision.com

Hikvision Kazakhstan T +7-727-9730667 nikia.panfilov@hikvision.ru

Hikvision Vietnam T +84-974270888 sales.vt@hikvision.com Hikvision UAE T +971-4-4432090 salesme@hikvision.com

Hikvision Singapore T +65-6684-4718 sg@hikvision.com

Hikvision Spain T +34-91-737-16-55 info.es@hikvision.com

Hikvision Tashkent T +99-87-1238-9438 uzb@hikvision.ru

Hikvision Hong Kong T +852-2151-1761 info.hk@hikvision.com Hikvision Russia T +7-495-669-67-99 saleru@hikvision.com

Hikvision Korea T +82-{0}31-731-8817 sales.korea@hikvision.com

Hikvision Poland T +48-22-460-01-50 info.pl@hikvision.com

Hikvision Indonesia T+62-21-2933759 Sales.Indonesia@hikvision.com

Hikvision Colombia sales.colombia@hikvision.com



© Hikvision Digital Technology Co., Ltd. 2020 | Data subject to change without notice |