

# RG-EG105GW-X

## Wi-Fi 6 AX3000 Wireless All-in-One Business Router

DATASHEET



### Highlights

- A professional and high performance Wi-Fi 6 business router.
- Full Wi-Fi coverage with 5 high gain external antennas.
- Press button, ReYee Mesh networking done.
- Rich enterprise-grade features for business scenarios.
- Securely monitoring the NVR/IPC/internal server anytime from anywhere.

# Highlight Features

## Best-in-class All-in-One Wireless Router



A professional and high performance Wi-Fi 6 wireless router for small size businesses.



- Wi-Fi 6 AX3000
- 5 \* 5dBi Antenna
- Reyee Mesh
- 4 WAN Load Balancing
- VPN IPSec, OpenVPN, L2TP, PPTP, etc.
- Free Cloud Management

## Enter the Era of Ultra-high Wi-Fi 6 Speed

With a revolutionary combination of OFDMA and 1024QAM, the latest 802.11ax standard, and the 160MHz band, RG-EG105GW-X wireless aggregation rate reaches 2.976Gbps.

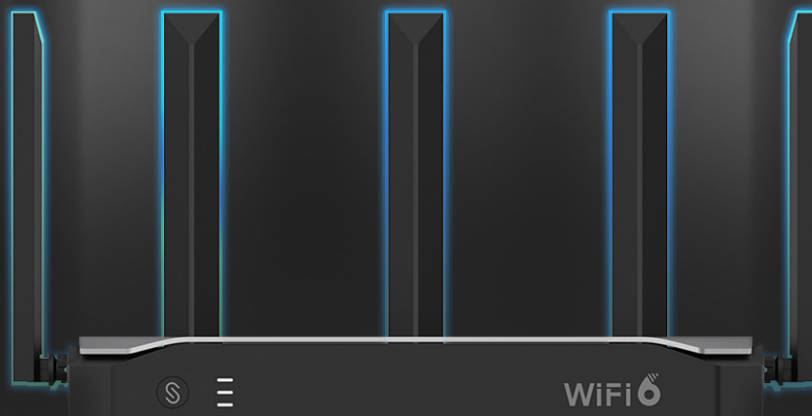

# Highlight Features

## Power On, Business On

Easy to set up the whole network with all-in-one wireless router by mobile APP.



## Press Button, Reye Mesh Networking Done

Less wiring, more relaxing.






# Highlight Features

## New Efficient Way of Application/Bandwidth Management

### Application Based Bandwidth Policy


	<b>Video Conference</b> High-priority 20 Mbps
	<b>HD Video</b> 5 Mbps
	<b>Social Media</b> 5 Mbps

### User Based Bandwidth Policy

	<b>User Group Management</b> 50 Mbps
	<b>User Group Finance</b> High-priority 30 Mbps
	<b>User Group Other staff</b> 100 Mbps

## Cloud, Make Your Business Easy

- Reeye free DDNS
- Cloud portal authentication
- Remote monitoring and maintenance
- Upgrade firmware via Cloud
- APP library dynamic update

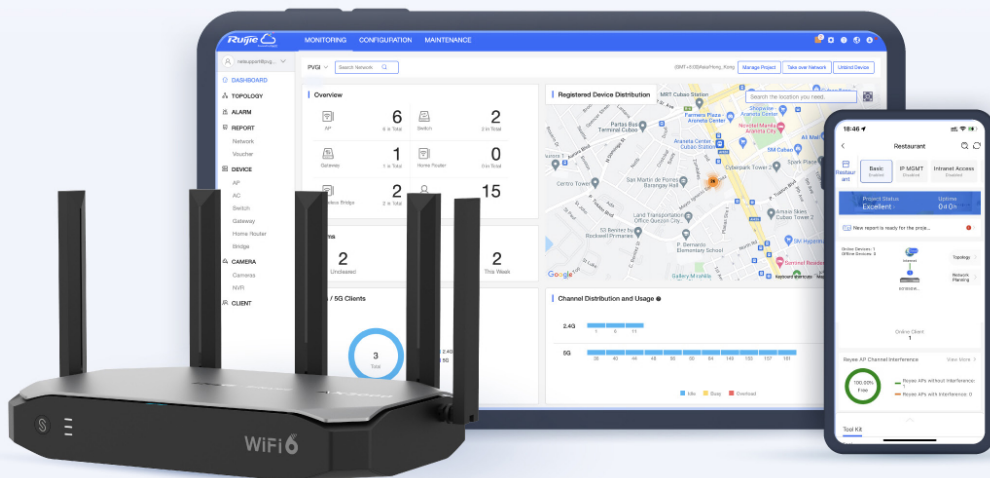

# Specifications

## Hardware Specifications

### Hardware Basic

Service Ports	5 x 10/100/1000 Base-T (1 fixed WAN, 1 fixed LAN, 3 LAN/WAN switchable) 1 x USB 3.0
SDRAM/RAM	512 MB
Flash Memory	128 MB
Radio Design	2.4GHz, 2x2, MU-MIMO 5GHz, 2x2, MU-MIMO
Standard & Protocol	Wi-Fi 6 (IEEE 802.11ax) Wi-Fi 5 (IEEE 802.11ac Wave 2) Wi-Fi 4 (IEEE 802.11n) IEEE 802.11a IEEE 802.11b/g
Operation Frequency Bands	802.11b/g/n/ax: 2.400 GHz to 2.4835 GHz 802.11a/n/ac/ax: 5.150 GHz to 5.350 GHz, 5.470 GHz to 5.725 GHz , 5.725 GHz to 5.850 GHz country-specific restrictions apply  Egypt: 802.11b/g/n: 2.4 GHz ~ 2.4835 GHz 802.11a/n/ac: 5.150 GHz ~ 5.350 GHz
Antenna	5 External Antennas (2.4 GHz: 5 dBi, 5 GHz: 5 dBi)
Wireless Data Rate	2.4 GHz: 574 Mbps 5 GHz: 2402 Mbps
Max Transmit Power	5725 MHz to 5850 MHz: 33 dBm (EIRP) 5150 MHz to 5350 MHz: 23 dBm (EIRP) 2400 MHz to 2483.5 MHz: 20 dBm (EIRP)  Myamar: 2400 MHz~2483.5 MHz ≤ 20 dBm 5150 MHz~5350 MHz ≤ 23 dBm 5470 MHz~5850 MHz ≤ 25 dBm Thailand: 2400 MHz~2483.5 MHz ≤ 20 dBm 5150 MHz~5350 MHz ≤ 23 dBm 5470 MHz~5725 MHz ≤ 25 dBm 5725 MHz~5850 MHz ≤ 30 dBm  Egypt: 2400 MHz~2483.5 MHz ≤ 20 dBm (EIRP) 5150 MHz~5350 MHz ≤ 20 dBm (EIRP)

# Specifications

## Basic Feature

Modulation OFDM: BPSK@6/9 Mbps, QPSK@12/18 Mbps, 16QAM@24 Mbps, 64QAM@48/54 Mbps DSSS: DBPSK@1 Mbps, DQPSK@2 Mbps, and CCK@5.5/11 Mbps MIMO-OFDM: BPSK, QPSK, 16QAM, 64QAM, 256QAM and 1024QAM OFDMA

Recommended maximum Clients	Recommended total clients: 180
	Recommended wireless clients: 80

Recommended ISP Bandwidth 1.2 Gbps

Local Power Supply	100V~240V AC, 50/ 60Hz
--------------------	------------------------

Max Power Consumption 20 W

### Physical Parameters

Dimensions (W x D x H)	283 mm × 172 mm × 46 mm (11.14 in. × 6.77 in. × 1.81 in.) Note: The value (46 mm/1.81 in.) only indicates the height of the main unit, excluding that of the antenna.
------------------------	--

Weight ≤ 2 kg (4.41 lbs)

Operating Temperature	0°C to 40°C (32°F to 104°F)
-----------------------	-----------------------------

Storage Temperature -40°C to 70°C (-40°F to 158°F)

Operating Humidity	5% RH to 95% RH (non-condensing)
--------------------	----------------------------------

Storage Humidity 5% RH to 95% RH (non-condensing)

## Software Specifications

### Basic Features

Internet Access Mode	PPPoE Client DHCP Client Static IP
----------------------	--

Access Mode Auto-Identification ✓

WAN IP Address Conflict Avoidance	✓
-----------------------------------	---

PPPoE Account and Password Learned from Other Routers ✓

# Specifications

Software Specifications	
VLAN	8
IPv6	✓
Network Management	
IPTV	✓
AC Mode	✓
Behavior Management	App Block (Time/IP-based Policy) Website Filtering
Application Identification	Identify 100+ Applications, including Office, IM, Web Page, Online Shopping, Online Gaming, P2P Download and Popular Videos
Application Priority	✓
Flow Control	Smart Flow Control Custom flow Control Policies IP-based Automatic Bandwidth Assignment
Traffic Audit	Real-time Traffic Audit
Fault Diagnosis	✓
Marketing Authentication	WiFiDog (SMS Authentication and One-click Authentication)
Local Authentication	Portal Authentication Password Authentication QR Code Authentication
VPN	
L2TP VPN	✓
PPTP VPN	✓
IPsec VPN	✓
OpenVPN	✓
PPTP&L2TP&OpenVPN Accounts	100
IPsec VPN Performance	28 Mbps
L2TP VPN Performance	190 Mbps

# Specifications

## Software Specifications

OpenVPN Performance	20 Mbps
IPsec VPN Tunnels	8
OpenVPN Tunnels	16
L2TP VPN Tunnels	8
<b>Routing</b>	
Static Routing	✓
RIP/RIPng	✓
Policy-based Routing	✓
Active/Standby Switchover	✓
WAN Port Load Balancing	✓
IP-based Load Balancing	✓
Flow-based Load Balancing	✓
Load Balancing Based on Weights of Member Interfaces	✓
ISP Routing	✓
<b>Networks</b>	
PPPoE Client	✓
PPPoE Server	✓
DHCP Server	✓
DNS Client	✓
DNS Server	✓
DNS Proxy	✓
NTP Client	✓



# Specifications

## Software Specifications

	Oray DDNS DynDns NO-IP Ruijie DDNS
DDNS	
NAT	✓
NAPT	✓
NAT ALG	✓
Port Mapping	✓
UPnP	✓
Ruijie Cloud	✓
<b>ACL</b>	
ACL	✓
Time-based Extended ACL	✓
<b>Security</b>	
Malicious Attack Prevention	✓
ARP Binding	✓
Port Scan Attack Prevention	✓
Fragmentation Attack Prevention	✓
DoS Teardrop Attack Prevention	✓
Malformed Packet Attack Prevention	✓
DoS LAND Attack Prevention	✓
Smurf Attack Prevention	✓
SYN Flood Attack Prevention	✓

# Specifications

## Software Specifications

### WLAN

Max Managed APs

Gateway Mode: 64  
(Bypass mode is not supported.)

AP Management

Multi-SSID configuration  
SSID hiding, channel configuration  
power configuration  
AP wired port configuration  
AP online upgrade  
STA limit  
STA blacklist/whitelist

Roaming

Local roaming  
layer 2 roaming  
layer 3 roaming  
STA roaming track

### Service and Support

Cloud Management

✓

App Management

✓

App Upgrade

✓

App Restart

✓

Scheduled Restart

✓

Local Upgrade

✓

Online Upgrade

✓

Configuration Backup




✓

Factory Settings




✓

# Antenna Schematic

2.4GHz

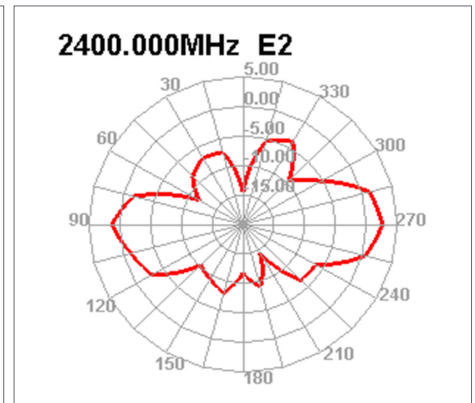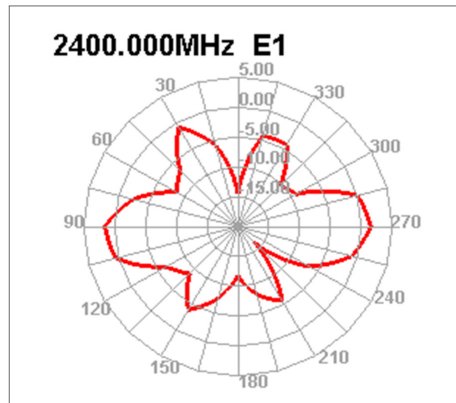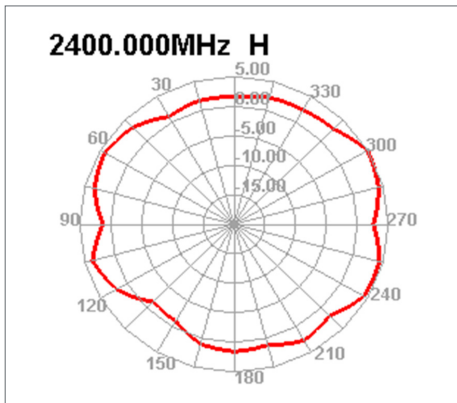

5GHz

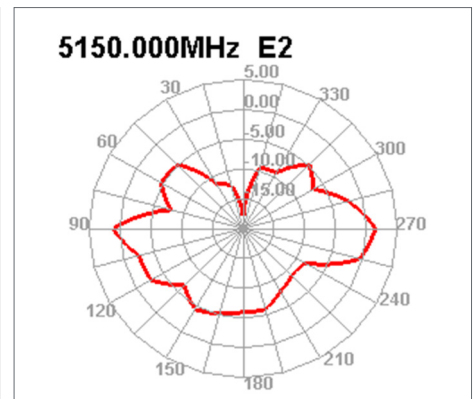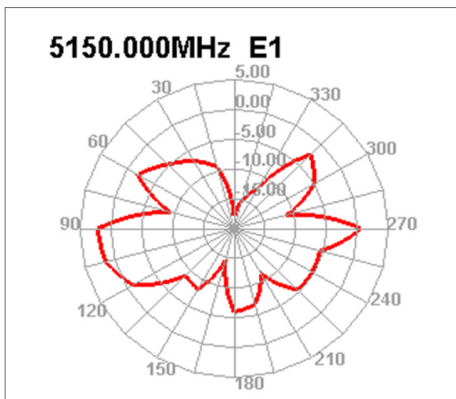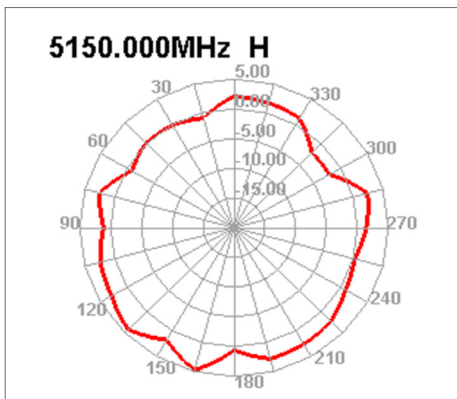

# Package Contents

Package Information	RG-EG105GW-X
Router	1
Power Cord	1
User Manual	1
Warranty Card	1
Package Weight	1.71 kg
Package Dimension (w x d x h)	418 mm x 368 mm x 65 mm

**Ruijie | Rcycc**

**R**edefine your **e**asy **n**etwork

---

**Copyright ©2000-2022 Ruijie Networks Co., Ltd. All rights reserved.**

No part of this document may be reproduced or transmitted in any form or any means without prior written consent of Ruijie Networks Co., Ltd.

**Notice**

This content is applicable only to regions outside the China mainland. Ruijie Networks Co., Ltd. reserves the right to interpret this content.

The information contained herein is subject to change without notice. Nothing herein should be construed as constituting an additional warranty. Ruijie Networks Co., Ltd. shall not be liable for technical or editorial errors or omissions contained herein.



Ruijie Networks Co., Ltd  
Floor 11, East Wing, Zhongyipengao Plaza,  
No.29 Fuxing Road, Haidian District, Beijing China  
Website: <https://www.ruijienetworks.com>