

# RG-RAP2260 Series Reyee Wi-Fi 6 AX3200/AX1800 Indoor Access Point

DATASHEET



## Highlights

- Build ultra-high performance network with 3202 Mbps wireless throughput.
- Client connections over 500, provide higher practical performance for users as well.
- Boost Internet Speed with 2.5 Gbps uplink.
- Easily install extra AP with Reyee Mesh technology.
- Set up Wi-Fi 6 network in 3 minutes with Ruijie Cloud APP.

# Highlight Features

## Easily Build Your Ultra-High Performance Network in High-Density Environment

Interface

Installation



3202

Mbps

WiFi 6 AX3200 Wi-Fi 6

2.5Gbps Wired Uplink

4x4 MIMO 4x4 MU-MIMO

Reye Mesh Technology

Free Cloud Management

## Easily Build Your Ultra-High Performance Network in High-Density Environment

Interface

Installation



WiFi 6 AX3200 Wi-Fi 6

2.5Gbps Wired Uplink

4x4 MIMO 4x4 MU-MIMO

Reye Mesh Technology

Free Cloud Management

# Highlight Features


## Provide Higher Practical Performance for Users

Reyee RG-RAP2260(E) AP's 2.4GHz and 5GHz radio outperformed the Ubiquiti U6-LR dramatically in both the transmit and receive tests.



\* Source: Tolly Test Report #221153 November 2021

4x4:4 MIMO Wi-Fi 6 Access Point Wireless Performance - Single Client - 2.4GHz Radio  
(as reported by Keysight IxChariot)

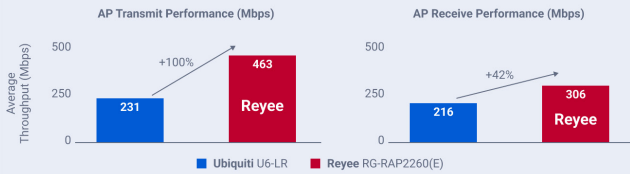


Note: Average of two runs. AP and client in shielded chamber. 20 streams. All tests run on auto channel with 40MHz bandwidth. One desktop with the ASUS PCE-AC88 802.11ac Network Adapter was used as the client.

Source: Tolly, October 2021

Figure 1

4x4:4 MIMO Wi-Fi 6 Access Point Wireless Performance - Single Client - 5GHz Radio  
(as reported by Keysight IxChariot)

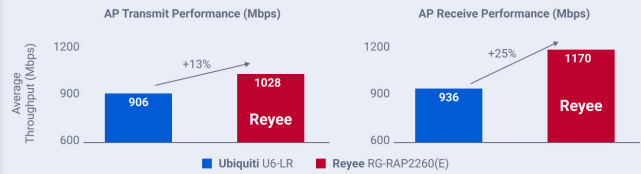


Note: Average of two runs. AP and client in shielded chamber. 20 streams. All tests run on auto channel with 80MHz bandwidth. One desktop with the ASUS PCE-AC88 802.11ac Network Adapter was used as the client.

Source: Tolly, October 2021

Figure 2

## Better Multi-User Experience in High-Density Scenarios

Performance upgraded, support client connections over 500.

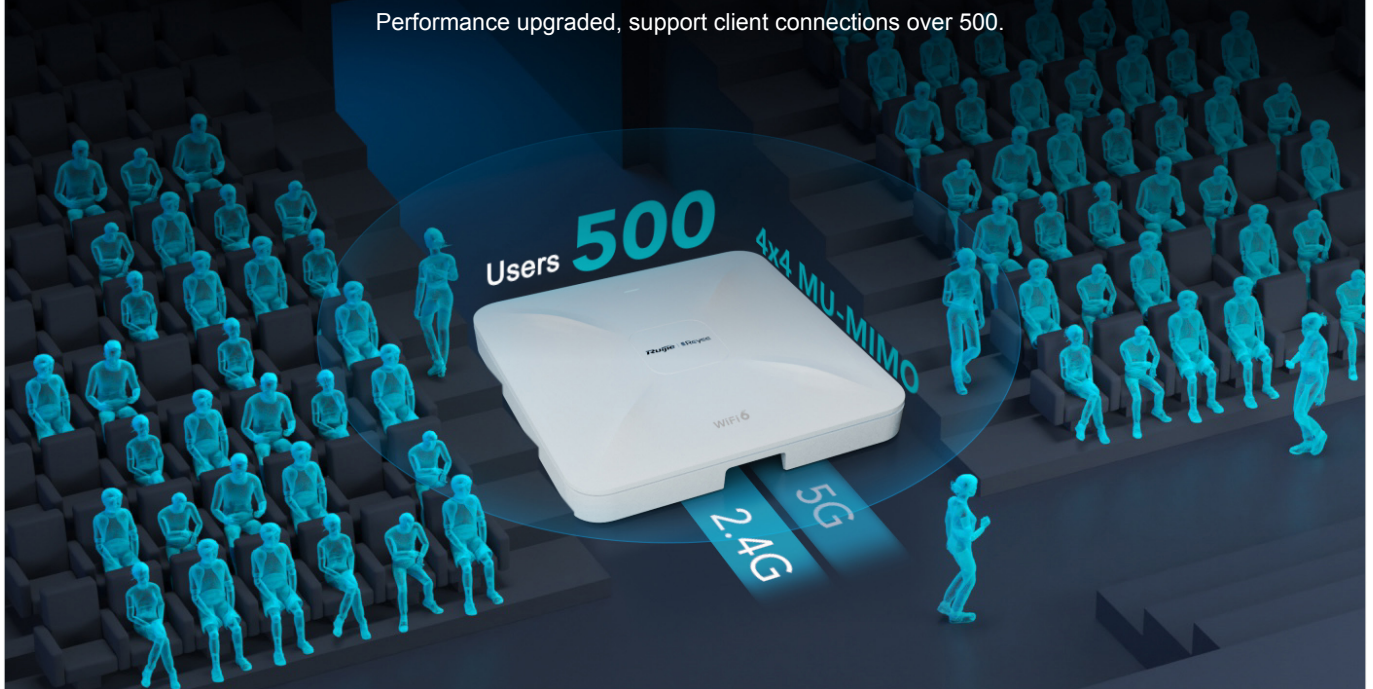


# Highlight Features

## Boost Your Internet Speed with 2.5Gbps Uplink

Build network for future, protect your investments.

Wireless 3200Mbps

Wired 2500Mbps

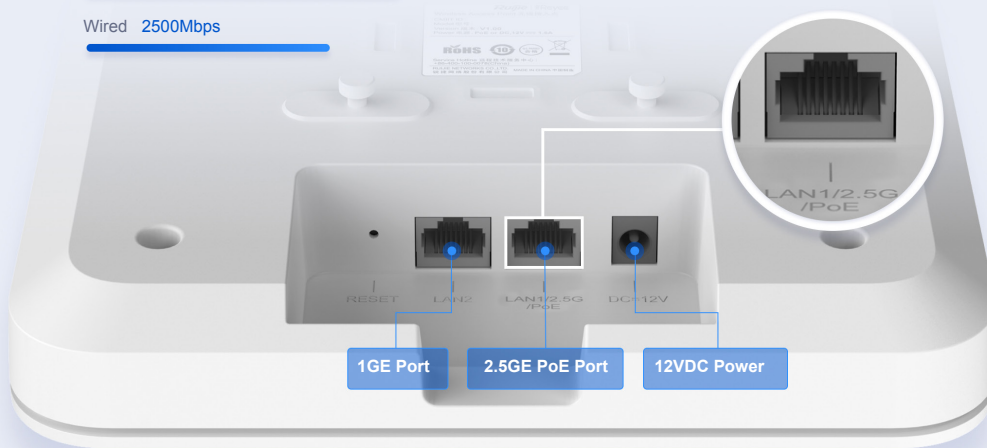

## Easily Set Up Your Wi-Fi 6 Network in 3 Minutes

With SON (Self-organizing Network) technology, easily set up a whole Wi-Fi network by Ruijie Cloud APP.






## Highlight Features


### Easily Install Extra AP with Reyee Mesh

Less wiring, more relaxing.

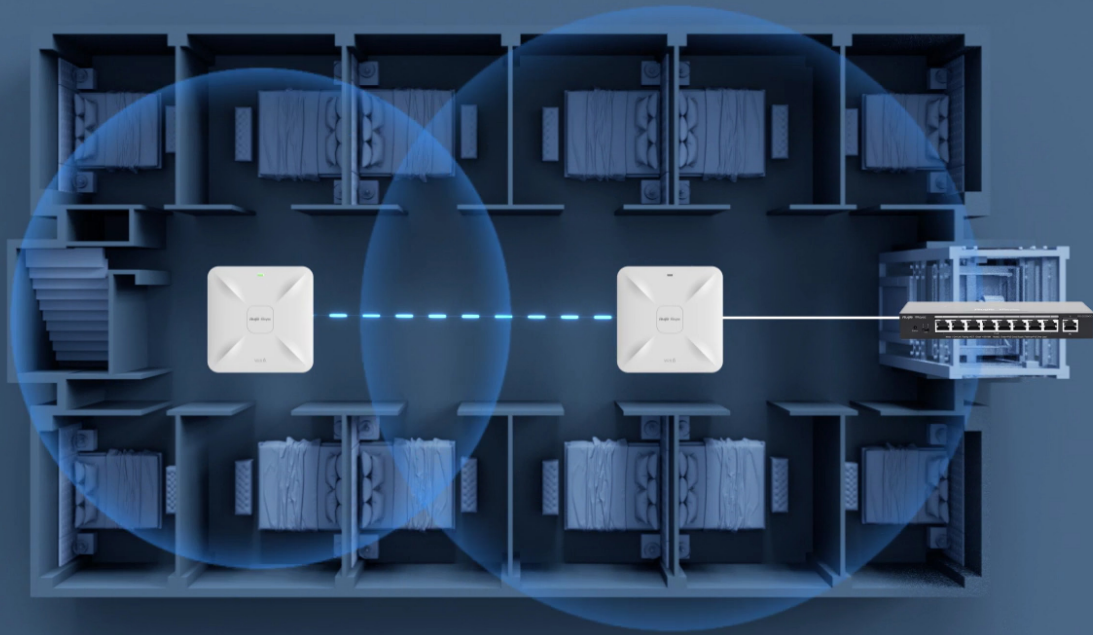

### Cloud, Make Your Business Easy

- Self-organizing network
- Centralized network management
- Scenario based configuration
- Cloud portal authentication
- Remote monitoring and maintenance

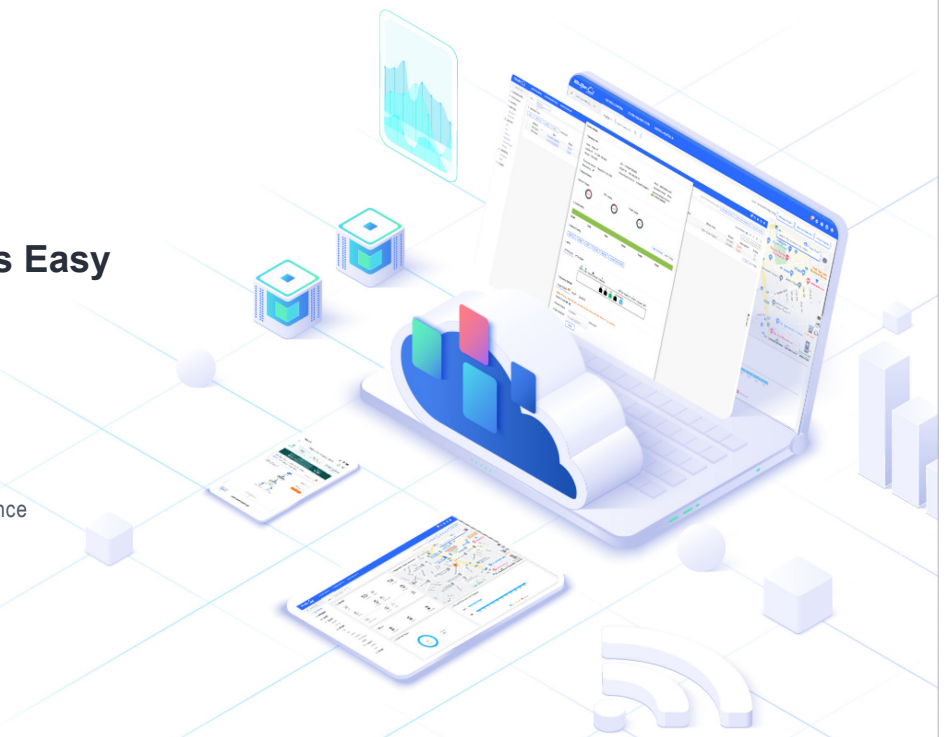

# Specifications

## Hardware Specifications

Model	RG-RAP2260(G)	RG-RAP2260(E)
Radio	Dual-stream dual-band	
Protocol	Wi-Fi 6 (IEEE 802.11ax) Wi-Fi 5 (IEEE 802.11ac Wave 2/Wave1) Wi-Fi 4 (IEEE 802.11n) 802.11a/b/g	
Operating Bands	802.11b/g/n/ax: 2.4 GHz ~ 2.4835 GHz 802.11a/n/ac/ax: 5 GHz: 5.150 GHz ~ 5.350 GHz, 5.725 GHz ~ 5.850 GHz (country specific)	802.11b/g/n: 2.4 GHz ~ 2.4835 GHz 802.11a/n/ac/ax: 5 GHz: 5.150 GHz ~ 5.350 GHz, 5.725 GHz ~ 5.850 GHz (country specific)
Antenna	Built-in Omnidirectional Antennas (2.4 GHz: 3dBi, 5 GHz: 3dBi)	
Spatial Streams	2.4GHz: 2x2 MIMO 5GHz: 2x2 MIMO	2.4GHz: 4x4 MIMO 5GHz: 4x4 MIMO
Max Throughput	Up to 574 Mbps at 2.4 GHz Up to 1201 Mbps at 5 GHz 1.775 Gbps per AP	Up to 800 Mbps at 2.4 GHz Up to 2402 Mbps at 5 GHz 3.202 Gbps per AP
Modulation	OFDM: BPSK@6/9 Mbps, QPSK@12/18 Mbps, 16QAM@24 Mbps, 64QAM@48/54 Mbps DSSS: DBPSK@1 Mbps, DQPSK@2 Mbps, and CCK@5.5/11 Mbps MIMO-OFDM: BPSK, QPSK, 16QAM, 64QAM, 256QAM and 1024QAM OFDMA	OFDM: BPSK@6/9 Mbps, QPSK@12/18 Mbps, 16QAM@24 Mbps, 64QAM@48/54 Mbps DSSS: DBPSK@1 Mbps, DQPSK@2 Mbps, and CCK@5.5/11 Mbps MIMO-OFDM: BPSK, QPSK, 16QAM, 64QAM, 256QAM and 1024QAM OFDMA
Receive Sensitivity	11b: -96 dBm(1 Mbps), -93 dBm(5 Mbps), -89 dBm(11 Mbps) 11a/g, -91 dBm(6 Mbps), -85 dBm(24 Mbps), -80 dBm(36 Mbps), -74 dBm(54 Mbps) 11n: -90 dBm(MCS0), -70 dBm(MCS7), -89 dBm(MCS8), -68 dBm(MCS15) 11ac: 20MHz: -88 dBm(MCS0), -63 dBm(MCS9) 40MHz: -85 dBm(MCS0), -60 dBm(MCS9) 80MHz: -85 dBm(MCS0), -60 dBm(MCS9) 11ax: 80MHz: -82 dBm(MCS0), -57 dBm(MCS9), -52 dBm(MCS11)	11b: -96 dBm(1 Mbps), -93 dBm(5 Mbps), -89 dBm(11 Mbps) 11a/g, -91 dBm(6 Mbps), -85 dBm(24 Mbps), -80 dBm(36 Mbps), -74 dBm(54 Mbps) 11n: -90 dBm(MCS0), -70 dBm(MCS7), -89 dBm(MCS8), -68 dBm(MCS15) 11ac: 20MHz: -88 dBm(MCS0), -63 dBm(MCS9) 40MHz: -85 dBm(MCS0), -60 dBm(MCS9) 80MHz: -85 dBm(MCS0), -60 dBm(MCS9) 11ax: 80MHz: -82 dBm(MCS0), -57 dBm(MCS9), -52 dBm(MCS11)

# Specifications

## Hardware specifications

Model	RG-RAP2260(G)	RG-RAP2260(E)
Max. Transmit Power	2.4 GHz(2.4 GHz~2.4835 GHz): 23 dBm 5 GHz(5.150 GHz~5.250 GHz,5.725 GHz~5.850 GHz), 23 dBm (country-specific, comply with local laws)	2.4 GHz(2.4 GHz~2.4835 GHz): 23 dBm 5 GHz(5.150 GHz~5.250 GHz,5.725 GHz~5.850 GHz), 23 dBm (country-specific, comply with local laws)
Dimensions	194 mm×194 mm×35 mm (excluding mounting kits)	220 mm×220 mm×35 mm (excluding mounting kits)
Weight	0.56 kg (excluding mounting kits)	1.05 kg (excluding mounting kits)
Service Ports	2 x10/100/1000M Base-T LAN1 port supports PoE	1 x 10/100/1000M/2.5G Base-T (PoE In); 1 x 10/100/1000M Base-T
LED Indicator	Single indicator (green light)	
Power Supply	Local power supply, DC 12V/ 1.5A (Note: The power adapter is sold as an optional accessory), 802.3at PoE (Warning: 802.3af or non-standard POE adapter may cause unknown issues. Please use Ruijie POE+ switch or 802.3at POE adapter as power supplier)	
Power Consumption	≤ 15.3W	≤ 25.4W
Environment	Operating temperature: 0°C ~ 40°C	
	Storage temperature: -40°C ~ 70°C	
	Operating humidity: 55% ~ 95% (non-condensing)	
	Storage humidity: 5% ~ 95% (non-condensing)	
Installation	Ceiling/wall-mountable	
Safety Standard	GB4943, IEC 62368-1	
EMC Standard	GB9254, EN301 489, EN50155, EN50121, EN55032, EN61000, EN55035	
Vibration Standard	IEC61373	
Radio Standard	EN300 328, EN301 893	
MTBF	>400000H	

# Specifications

## Software Features

Model	RG-RAP2260(G)	RG-RAP2260(E)
Operating Mode	AP mode and routing mode	
WLAN	Maximum number of clients: 512	
	Recommended number of clients: 100	Recommended number of clients: 120
	Up to 8 SSIDs	
	Support SSID hiding Configuring the authentication mode encryption mechanism VLAN attributes for each SSID	
	SSID-based and radio-based STA limit	
	Support Layer 2 user isolation	
Roaming	Support Layer 2 and Layer 3 roaming	
Security	Support PSK authentication	
	Support static blacklist and whitelist	
	Support WPA (TKIP), WPA2 (AES), and WPA-PSK data encryption	
	Support Black List / White List: Maximum 256 rules per SSID Maximum 1024 rules per AP	
Routing	Support static IP address, DHCP, PPPoE Dial Up	
Management and maintenance	Support unified networking of all network equipment Support local or remote management with Ruijie Cloud app Support local management with web Support remote management with Ruijie Cloud platform	
Platform management features	Automatic RF adjustment via the platform Unified configuration via the platform Unified monitoring via the platform	



## Package Contents

Device	RG-RAP2260(G)	RG-RAP2260(E)
Mounting Bracket	1	1
Cross Pan Head Screw	2	2
Expansion Anchor	2	2
Quick Start Guide	1	1
Warranty Card	1	1
Package Weight	0.83kg	1.43kg
Package Dimension (w x d x h)	222 mm x 220 mm x 68 mm	290 mm x 290 mm x 71 mm

**Ruijie** | 睿捷 Rcycc

 **R**edefine your easy network



Ruijie Networks Co., Ltd  
Floor 11, East Wing, Zhongyipengao Plaza,  
No.29 Fuxing Road, Haidian District, Beijing China  
Website: <https://www.ruijienetworks.com>