

DH-IPC-EBW81242-AS-S2

12 MP IR Fisheye WizMind Network Camera



WizMind

- 12 MP 1/1.7" CMOS image sensor, low luminance, and high definition image.
- Outputs max. 12M (4000 × 3000)@25 fps; supports 8M (3280 × 2480)@25/30 fps.
- Built-in IR LED, and the max. illumination distance is 10 m.
- Intelligent monitoring: Intrusion, tripwire, heat map, and people counting.
- SMART H.264 +/H.265+, flexible coding, applicable to various bandwidth and storage environments.
- Alarm: 2 in, 2 out; audio: 1 in, 1 out; supports max. 256 G Micro SD card; built-in dual-array Mic and speaker.
- 12 VDC/PoE power supply.
- IP67 and IK10 protection.



Launched by Dahua Technology, Dahua WizMind is a full portfolio of solutions composed of project-oriented products including IPC, NVR, PTZ, XVR, Thermal and software platform which adopts industry-leading deep learning algorithms. Focusing on customer's requirements, WizMind provides precise, reliable and comprehensive AI solutions for verticals.

Series Overview

With fisheye lens, Dahua Fisheye series camera can realize 360° surveillance, and it is widely applied in various scenes such as airports, shopping centers, banks and hotels.

Functions

Smart H.265+ & Smart H.264+

With advanced scene-adaptive rate control algorithm, Dahua smart encoding technology realizes the higher encoding efficiency than H.265 and H.264, provides high-quality video, and reduces the cost of storage and transmission.

Fisheye VR

With intelligent algorithm, Dahua Fisheye VR technology provides interactive 3-dimensional dynamic view through fisheye image. Dahua fisheye VR supports various interactive modes, such as original, bowl, cylinder and asteroid, providing more interactive experience.

People Counting

With advanced stereo image technology and deep learning algorithm, Dahua In Area No. technology recognizes human targets accurately to count people in area in real-time. You can set people quantity threshold, when the number larger or smaller than the threshold, it triggers linkage. It is applicable in the scene that has limit on people quantity.

Queue Management

With advanced image processing technology and deep learning algorithm, Dahua Queue Management technology counts people quantity in selected area in real time to realize queue management. It supports multiple polygon areas. When No. in area/strand time is not smaller or not larger than the threshold, it triggers alarm.

Heat Map

With deep learning algorithm, Dahua People Counting technology can track and process moving human body targets to realize the accurate statistics of enter No., leave No., and In Area No. Working with management platform, it outputs reports to meet your requirements.

Protection (IP67, IK10, Wide Voltage)

IP67: The camera passes a series of strict test on dust and soak. It has dust-proof function, and the enclosure can work normal after soaking in 1 m deep water for 30 minutes.

IK10: The enclosure can stand the punch more than 5 times from a 5 kg hammer falling from a height of 40 cm (Impact energy is 20J).

Wide voltage: The camera allows ±30% (for some power supplies) input voltage tolerance (wide voltage range), and it is widely applied to outdoor environment with instable voltage.

Cyber Security

Dahua network cameras employ a series of security technologies, including security authentication and authorization, access control protocols, trusted protection, encrypted transmission and encrypted storage. These technologies improve the camera's defense against external cyber threats and prevent malicious programs from compromising the device.

Technical Specification

Camera

| | |
|----------------------------|---|
| Image Sensor | 1/1.7" CMOS |
| Max. Resolution | 4000 (H) x 3000 (V) |
| ROM | 2 GB |
| RAM | 4 GB |
| Scanning System | Progressive |
| Electronic Shutter Speed | Auto/Manual 1/3 s–1/100,000 s |
| Min. Illumination | 0.01 Lux@F2.0 (Color, 30 IRE) 0.001 Lux@F2.0 (B/W, 30 IRE) 0 Lux (Illuminator on) |
| S/N Ratio | > 56 dB |
| Illumination Distance | 10 m (32.81 ft) (IR) |
| Illuminator On/Off Control | Auto/Manual |
| Illuminator Number | 3 (IR LED) |

Lens

| | | | | |
|----------------------|-------------------------------------|----------------------|--------------------|---------------------|
| Lens Type | Fixed-focal | | | |
| Lens Mount | M12 | | | |
| Focal Length | 1.85mm | | | |
| Max. Aperture | F2.0 | | | |
| Field of View | Horizontal: 185°; Vertical: 180° | | | |
| Iris Control | Fixed | | | |
| Close Focus Distance | 0.4 m (1.31 ft) | | | |
| DORI Distance | Detect | Observe | Recognize | Identify |
| | 40.0 m (131.23 ft) | 16.0 m (52.49 ft) | 8.0 m (26.2 ft) | 4.0 m (13.12 ft) |

Smart Event

| | |
|----------|-----|
| Heat Map | Yes |
|----------|-----|

Professional, intelligent

| | |
|----------------------------|---------------------|
| IVS (Perimeter Protection) | Intrusion; tripwire |
|----------------------------|---------------------|

| | |
|-----------------|--|
| People Counting | Supports 4 rules to count the number of people entering, exiting, and staying separately. It will trigger alarm linkage when the number of people who entering, exiting or staying exceeds the threshold. It can display and export reports based on year, month, day, week, day or custom time. Supports 4 rules to count the number of people in area and will trigger alarm linkage when the average strand time or people number in the area exceeds the threshold. It can display and export reports based on year, month, day, week, day or custom time. Supports 4 queue management rules to count number of people queuing and queue time in real time, and it will trigger alarm linkage when the number of people queued or queue time exceeds the threshold. It can display and export reports based on year, month, day, week, day or custom time. |
|-----------------|--|

| | |
|--------------|---|
| Smart Search | Work together with Smart NVR to perform refine intelligent search, event extraction and merging to event videos |
|--------------|---|

Video

| | |
|-------------------|--|
| Video Compression | H.265; H.264; H.264H; MJPEG (Only supported by the sub stream) |
|-------------------|--|

| | |
|-------------|----------------------------|
| Smart Codec | Smart H.265+; Smart H.264+ |
|-------------|----------------------------|

| | |
|------------------|--|
| Video Frame Rate | Main stream: 4000 x 3000@(1–25/25 fps) sub stream: 704 x 576@(1–25/30 fps) third stream: 1280 x 960@(1–17/17 fps) Fisheye mode: 1O (4000 x 3000) 1P (4096 x 1024) 2P (2432 x 2432) 1R (1216 x 1216) 2R (2432 x 2432) 4R (2432 x 2432) 1O + 3R (2432 x 2432) *The values above are the max. frame rates of each stream; for multiple streams, the values will be subjected to the total encoding capacity. |
|------------------|--|

| | |
|-------------------|-----------|
| Stream Capability | 3 streams |
|-------------------|-----------|

| | |
|------------|---|
| Resolution | 4000 x 3000; 3280 x 2480; 2880 x 2160; (3M) 2048 x 1536; 1.3M (1280 x 960); D1 (704 x 576/704 x 480); CIF (352 x 288/352 x 240) |
|------------|---|

| | |
|------------------|---------|
| Bit Rate Control | CBR/VBR |
|------------------|---------|

| | |
|----------------|--|
| Video Bit Rate | H264: 8 kbps–16384 kbps H265: 3 kbps–16384 kbps |
|----------------|--|

| | |
|-----------|---------------------|
| Day/Night | Auto(ICR)/Color/B/W |
|-----------|---------------------|

| | |
|-----|-----|
| BLC | Yes |
|-----|-----|

| | |
|-----|-----|
| HLC | Yes |
|-----|-----|

| | |
|-----|------|
| WDR | DWDR |
|-----|------|

| | |
|---------------|--|
| White Balance | Auto; natural; street lamp; outdoor; manual; regional custom |
|---------------|--|

| | |
|--------------|------|
| Gain Control | Auto |
|--------------|------|

| | |
|-----------------|-------|
| Noise Reduction | 3D NR |
|-----------------|-------|

| | |
|------------------|-------------------------------|
| Motion Detection | OFF/ON (4 areas, rectangular) |
|------------------|-------------------------------|

| | |
|--------------------------|---------------|
| Region of Interest (RoI) | Yes (4 areas) |
|--------------------------|---------------|

| | |
|-------|-----|
| Defog | Yes |
|-------|-----|

| | |
|-----------------|---------|
| Privacy Masking | 4 areas |
|-----------------|---------|


| | |
|-----------------------|---|
| Audio | |
| Built-in MIC | Yes |
| Audio Compression | PCM; G.711A; G.711Mu; G.726; G.723 |
| Alarm | |
| Alarm Event | No SD card; SD card full; SD card durability warning; SD card error; network disconnection; IP conflict; illegal access; motion detection; video tampering; tripwire; intrusion; scene changing; audio detection; voltage detection; external alarm; people counting in area; stay detection; people counting; security exception |
| Network | |
| Network Port | RJ-45 (10/100/1000 Base-T) |
| SDK and API | Yes |
| Cyber Security | Video encryption; firmware encryption; configuration encryption; Digest; WSSE; account lockout; security logs; IP/MAC filtering; generation and importing of X.509 certification; syslog; HTTPS; 802.1x; trusted boot; trusted execution; trusted upgrade |
| Network Protocol | IPv4; IPv6; HTTP; TCP; UDP; ARP; RTP; RTSP; RTCP; RTMP; SMTP; FTP; SFTP; DHCP; DNS; DDNS; QoS; UPnP; NTP; Multicast; ICMP; IGMP; NFS; SAMBA; PPPoE; SNMP |
| Interoperability | ONVIF (Profile S/Profile G/Profile T); CGI; Milestone; Genetec; P2P (Only supported by general version) |
| User/Host | 20 |
| Storage | FTP; SFTP; Micro SD card (support max. 256 G); NAS |
| Browser | IE: IE11, IE10 Chrome: 48.0.2564.116 Firefox: 48.0.2 Edge: 42.17134.1.0 |
| Management Software | Smart PSS; DSS; DMSS |
| Certification | |
| Certifications | CE-LVD: EN62368-1 CE-EMC: Electromagnetic Compatibility Directive 2014/30/EU FCC: 47 CFR FCC Part 15, Subpart B UL/CUL: UL62368-1 & CAN/CSA C22.2 No. 62368-1-14 |
| Port | |
| Audio Input | 1 channel (RCA port) |
| Audio Output | 1 channel (RCA port) |
| Alarm Input | 2 channel in: 5mA 3V-5 VDC |
| Alarm Output | 2 channels out: 1,000mA 30 VDC/500mA 50 VDC |
| Power | |
| Power Supply | 12 VDC/PoE+ |
| Power Consumption | Basic: 6.5 W (12 VDC); 6.1 W (PoE) Max. (ICR + IR intensity): 13 W (12 VDC); 13.9 W (PoE) Heating: 3 W (12 VDC); 3 W (PoE) |
| Environment | |
| Operating Temperature | -40 °C to +60 °C (-40 °F to +140 °F) |
| Operating Humidity | ≤95% |

| | |
|---------------------|--------------------------------------|
| Storage Temperature | -30 °C to +70 °C (-22 °F to +158 °F) |
| Protection | IP67; IK10 |
| Structure | |
| Casing | Metal |
| Product Dimensions | 59.8 mm × Φ149.8 mm (2.35" × Φ5.90") |
| Net Weight | 0.79 kg (1.74 lb) |
| Gross Weight | 1.21 kg (2.67 lb) |

| Ordering Information | | |
|------------------------|-----------------------|---|
| Type | Model | Description |
| 12MP Camera | DH-IPC-EBW81242-AS-S2 | 12 MP IR Fisheye WizMind Network Camera |
| | IPC-EBW81242-AS-S2 | 12 MP IR Fisheye WizMind Network Camera |
| Accessories (Optional) | PFB300C | Ceiling-mount Bracket |
| | PFA100 | Adapting Plate |
| | PFB302S | Wall-mount Bracket |
| | PFA132-E | Junction Box |

Accessories

Optional

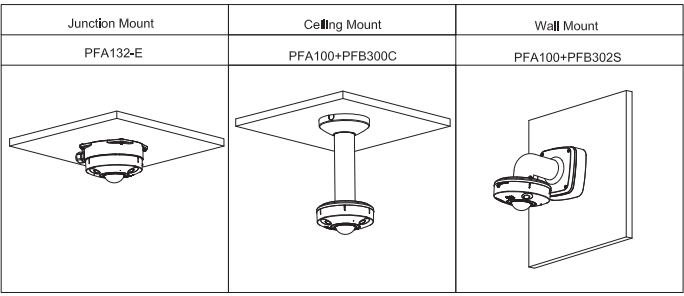

Dimensions (mm[inch])

