

**DESCRIPTION:**

The IS-SS-2G is a 2-gang, stainless steel, flush mount, audio only door station for use with the IS system. It is vandal and weather resistant and connects to the IS-CCU, IS-SCU, or IS-RCU using CAT-5e/6 cable.

The unit has a built-in dry contact for door release (24V AC/DC, 500mA). There is also a contact input on the station that can be used for connecting to a secondary call button. Power for the IS-SS-2G is provided by the exchange unit through the wire.


**IS-SS-2G FEATURES:**

- Dry contact for door release (24V AC/DC 500mA)
- Contact input for secondary call button
- Weather and Vandal resistant
- For indoor or outdoor use
- Stainless steel
- Flush mount to standard 2-gang box
- Surface mount with SBX-2G

# IS-SS-2G

## 2-Gang Audio Door Station for the IS Series

### FEATURE CALL-OUT:

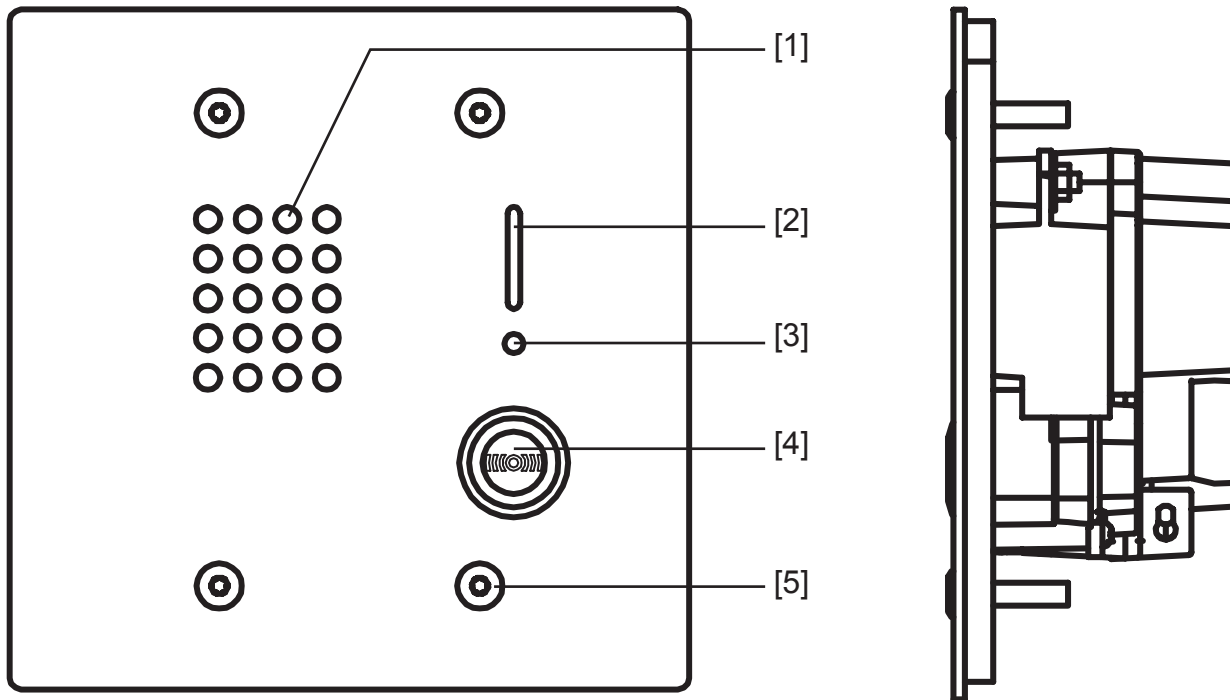

### FEATURE CALL-OUT DEFINITIONS:

- [1] Speaker
- [2] Microphone
- [3] Status LED (red/orange/green)
- [4] Call button
- [5] Tamper-proof screw (x4)

### SPECIFICATIONS:

- Power Source: Supplied from IS-CCU/SCU/RCU
- Communication: Open voice hands-free
- Mounting: Flush mount to 2-gang box
- Material: Stainless steel
- Temperature: 14 - 140°F (-10 - 60°C)
- Dimensions: 4-3/4"H x 4-3/4"W x 1-7/8"D
- Weight: Approx. 0.82lbs (370g)
- Ingress Protection: IP54