GT-1C7 7" Video Tenant Station



DESCRIPTION

The GT-1C7 is an audio/video tenant station for the GT Series Multi-Tenant Video Intercom system. It is equipped with door release and talk buttons. In addition, the station has a concierge/security guard call button and an option button to control external devices, such as lights. The station also has PanTilt and Zoom control, as well as a light adjustment button for the PTZ camera at the entry.

When a visitor calls, the tenant station rings and video is displayed on the screen. The call is answered by pushing the talk button. The GT-1C7 has the capability of calling the Concierge/Security Guard station(s), turning on an external light while speaking with a visitor at the entrance, and receiving an emergency tone from a pull cord or panic call button. The GT-1C7 has a slim, streamlined design and can be surface mounted. Only one GT-1C7 video station can be used per tenant.

Communication is hands-free at the entrance station when a tenant answers the call. While speaking with the visitor, the GT-1C7 can communicate with either hands-free (VOX) or push-to-talk (PTT) functionality.


GT-1C7 FEATURES

- 7" LCD color screen
- Hands-free audio communication
- Door release button
- Talk button
- Electrostatic concierge/security guard call button
- Option button for external devices
- PTZ and brightness control
- Call tone volume control
- Communication volume control



GT-1C7 7" Video Tenant Station

FEATURE CALL-OUT

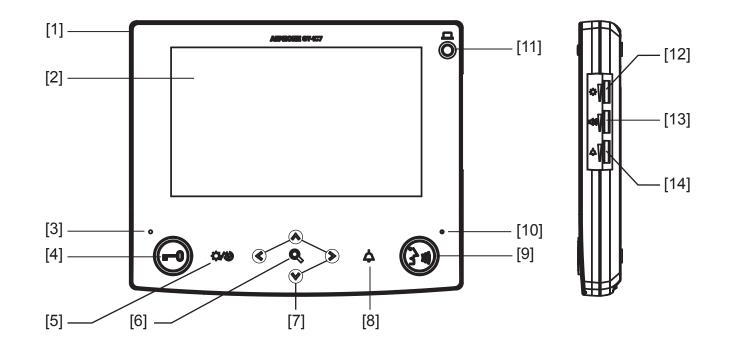

FEATURE CALL-OUT DEFINITIONS	SPECIFICATIONS	
[1] Speaker (on back of unit)[2] Color LCD video screen[3] Status indicator (orange)	Power Source:	24V DC, supplied from GT-BC
[4] Door release button and indicator (green) [5] Adjust button	Communication:	Hands-free or Push-to-talk
[6] Zoom/Wide button [7] PanTilt buttons	Screen:	7 inch TFT color LCD
[8] Concierge/security guard call/light button [9] Talk/Off button & indicator (orange)	Mounting:	Surface wall mount
[10] Microphone [11] Option button	Temperature:	32-104°F (0-40°C)
[12] Screen brightness control (0-10) [13] Receive volume control (0-10)	Dimensions:	6-½" H x 7-⅛" W x 1" D
[14] Call tone volume control (0-10)	Weight:	Approx. 1.25 lbs (570g)

