

DESCRIPTION

The GT-MCX is a network adaptor that allows multiple GT Series systems to be connected over a network. A typical system, when expanded, will support up to 16 entrance stations, 4 video guard stations, and 500 tenant stations. When using the GT-MCX, up to 32 GT Series systems can be connected together allowing the total capacity of the system to grow to 480 entrance stations, 96 video guard stations, and 5,000 tenant stations.

The GT-MCX divides a large system into sections. There can be 24 tenant sections and 8 main sections. The tenant section can consist of entrance stations, video guard stations, and tenant stations. The main section can consist of GT-DMB-N entrance stations and video guard stations only. Each GT-MCX takes the place of one entrance station and one video guard station.

The GT-MCX can be used to update the GT Series system from the GT Support Tool when connected to the same logical network. Updating the system could include changing tenant names and dialing numbers on both the guard and entrance stations.


FEATURES

- Allows for network connectivity
- Remote programming device via network
- Connect systems/buildings together
- Expand system capacity to multiple buildings, accessible from common entrance and guard stations

GT-MCX

Network Adaptor

FEATURE CALL-OUT

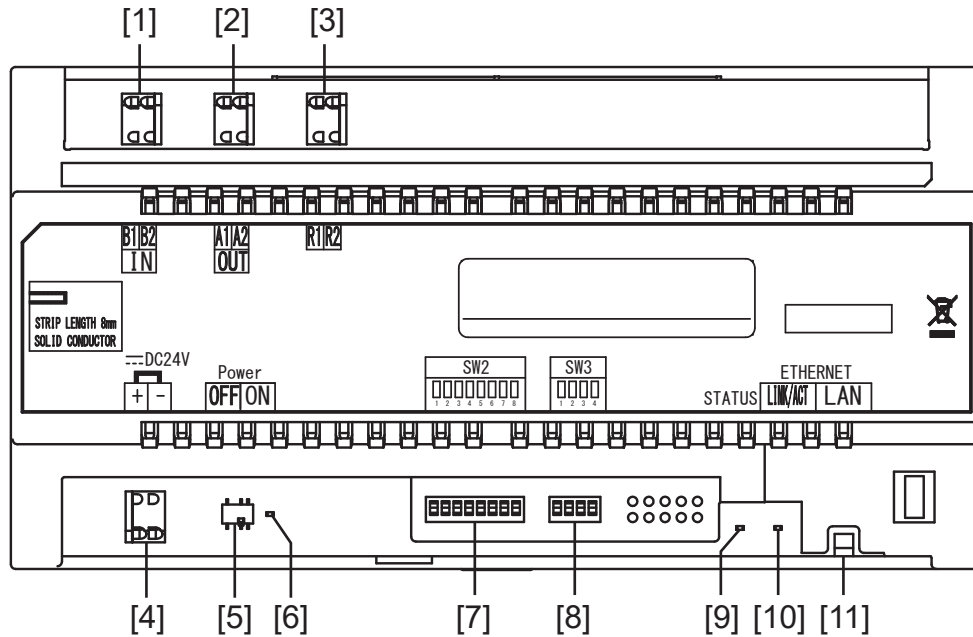

FEATURE CALL-OUT DEFINITIONS

- [1] Video in terminals
- [2] Video out terminals
- [3] Audio terminals
- [4] Power terminals
- [5] Power switch
- [6] Power on LED (green)
- [7] Setting switch (SW2)
- [8] Setting switch (SW3)
- [9] Status indicator (orange)
- [10] Status indicator (green)
- [11] LAN port

SPECIFICATIONS

Power:	24V DC, PS-2420UL Standby 75mA, Maximum 125mA
Temp Rating:	32° ~ 104°F (0° ~ 40°C)
Mounting:	Din Rail (supplied)
Material:	ABS Resin
LAN:	Ethernet 100BASE-TX
Protocol:	IPv4, IPv6, TCP, UDP, IGMP, MLD, DHCP, NTP, DNS
Encryption:	TLS1.2
Dimensions:	8-1/4" W x 4-1/4" H x 2-3/8" D
Weight:	0.75 lbs (340g)