

## DHI-LM22-B200S 21.45'' FHD Monitor



## Features :

- · Light and cost-effective plastic housing;
- · Ultra-narrow bezel , elegant appearance, metal base;
- 178°H/178°V extra-wide viewing angle for overall viewing performance;
- · High fidelity digital processing for a brilliant and vivid video;
- · Support multiple signal inputs such as HDMI, VGA;
- · Physical button control mode;
- · Low energy consumption, long service life;
- · Anti-blue light design,eye-protective.



Technical Specification				
Model		General		
Model	DHI-LM22-B200S	Power Supply	DC 12V	
Display		Consumption (Standard)	22W	
Screen Size	21.45"	Consumption (Standby)	≤0.5W	
Panel type	VA	Net Weight	2kg (4.4lb)	
Aspect Ratio	16:9	Gross Weight	3.12 kg (6.9lb)	
Resolution	1920×1080 (FHD)	Bezel Width	3.3mm(U/R/L) 15.2mm(B)	
Backlight	LED	Wall Mount	NA	
Brightness/Luminance	250 cd/ m² (max)	Dimension with stand (W×H×D)	492.7x284.0x39.5mm (20"x11.2"x1.6")	
Contrast	3000:1	Package(W×H×D)	598x99x366mm (23.6"x4.0"x14.5")	
Display Color	16.7M(8bit)	wite the second	Temperature	0°C~40°C (32°F~104°F)
Viewing Angle(H/V)	178°(H)/178°(V)	Work Environment	Humidity	10%~85%
Response time	OD 5ms	Accessory		
Refresh Rate	100Hz (max)	Standard	HDMI cable, Adapter, base	
Signals		Certifications		
Input	VGA×1, HDMI×1	Certifications	CE/FCC	
Output	NO			
Speaker				



1Wx2


© 2022 Dahua. All rights reserved. Design and specifications are subject to change without notice. The images, specifications and information mentioned in the document are only for reference, and might differ from the actual product

Speaker

Rev 002.000



## Dimensions(mm)

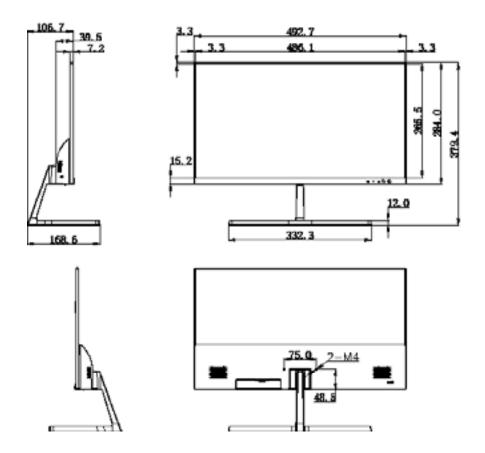

Rev 002.000 © 2022 Dahua. All rights reserved. Design and specifications are subject to change without notice. The images, specifications and information mentioned in the document are only for reference, and might differ from the actual product.

