

DS-UPS600 UPS



- Compact size
- Excellent microprocessor control guarantees high reliability






▪ Specification

| Parameters | |
|------------------------------------|--|
| Protection Method | Overload, discharge, and overcharge protection |
| Operating Temperature and Humidity | 0 °C to 40 °C (32 °F to 104 °F). Humidity 30% to 90% (non-condensing) |
| Weight | Approx. 4.2 kg (9.26 lb) |
| Dimension | 274 mm × 95 mm × 139 mm (10.79" × 3.74" × 5.47") |
| LED Indicator | Working Mode (AC Mode): Solid green Charging Mode (DC Mode): Solid red Overloading Mode: Flashing yellow |
| Alarm | Charging Mode (DC mode): Sounding every 10 seconds Low Battery: Sounding every second Overloading Mode: Sounding every 0.5 seconds Fault: Continuously sounding |
| Storage Conditions | -10 °C to 50 °C (14 °F to 122 °F). Humidity 20% to 95% (non-condensing) |
| Capacity | 600 VA / 360 W |
| Input Voltage Range (AC mode) | 85 VAC to 150 VAC (± 5 VAC) |
| Input Frequency Range | 50/60 Hz |
| Output Voltage Range (AC mode) | 102 VAC to 132 VAC |
| Output Voltage (Batt. mode) | 110 VAC to 125 VAC (No Load) |
| Frequency Range (Batt. Mode) | 50/60 Hz ± 0.5 Hz |
| Transfer Time | DC to AC ≤ 10 ms; AC to DC ≤ 10 ms |
| Waveform (Batt. Mode) | Charging Mode (DC Mode): PWM |
| POWER | |
| Battery | 12 V/7 Ah × 1 |
| Rechargeable | Typical recharge time: 10 to 16 hours |

▪ Available Model

DS-UPS600-x

▪ Dimension

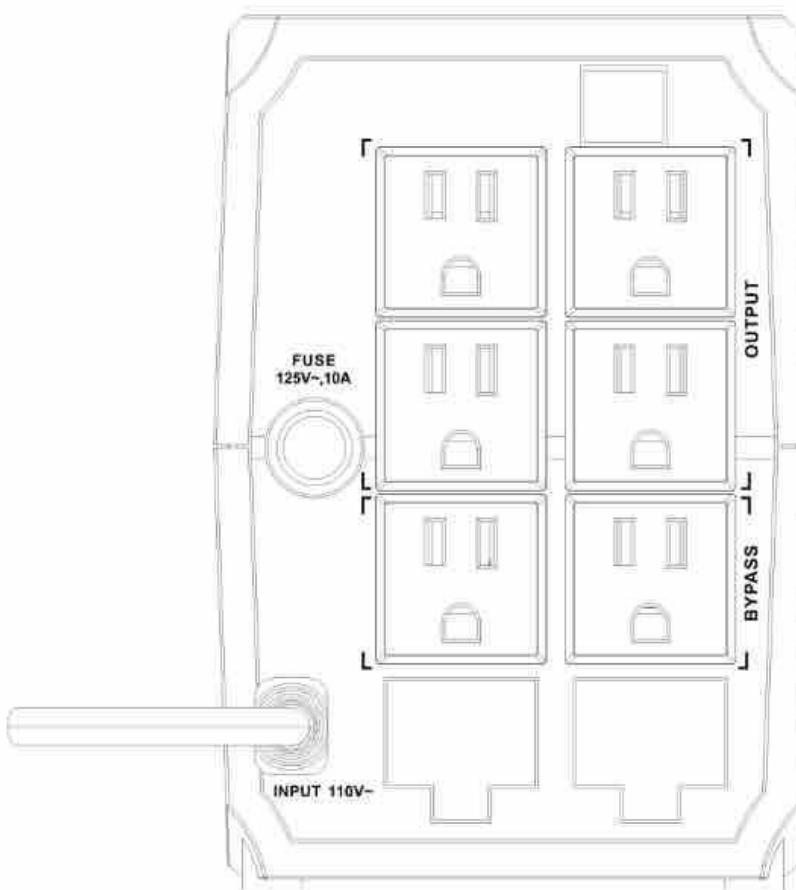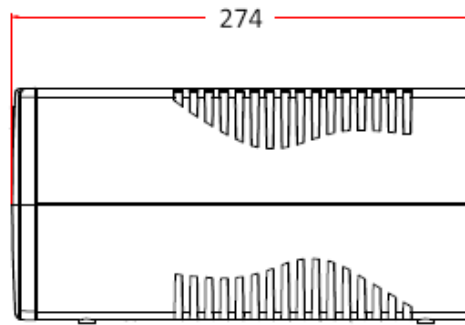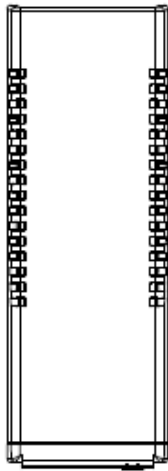

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

